


Powerful Double Bolt Double Band Clamp

- 1, Double bolts & double band providing high clamping force.
- 2, Two pairs solid metal rollers complement the strength of the double band
- 3, Two bridges welded onto clamp band for optimal hose protection.

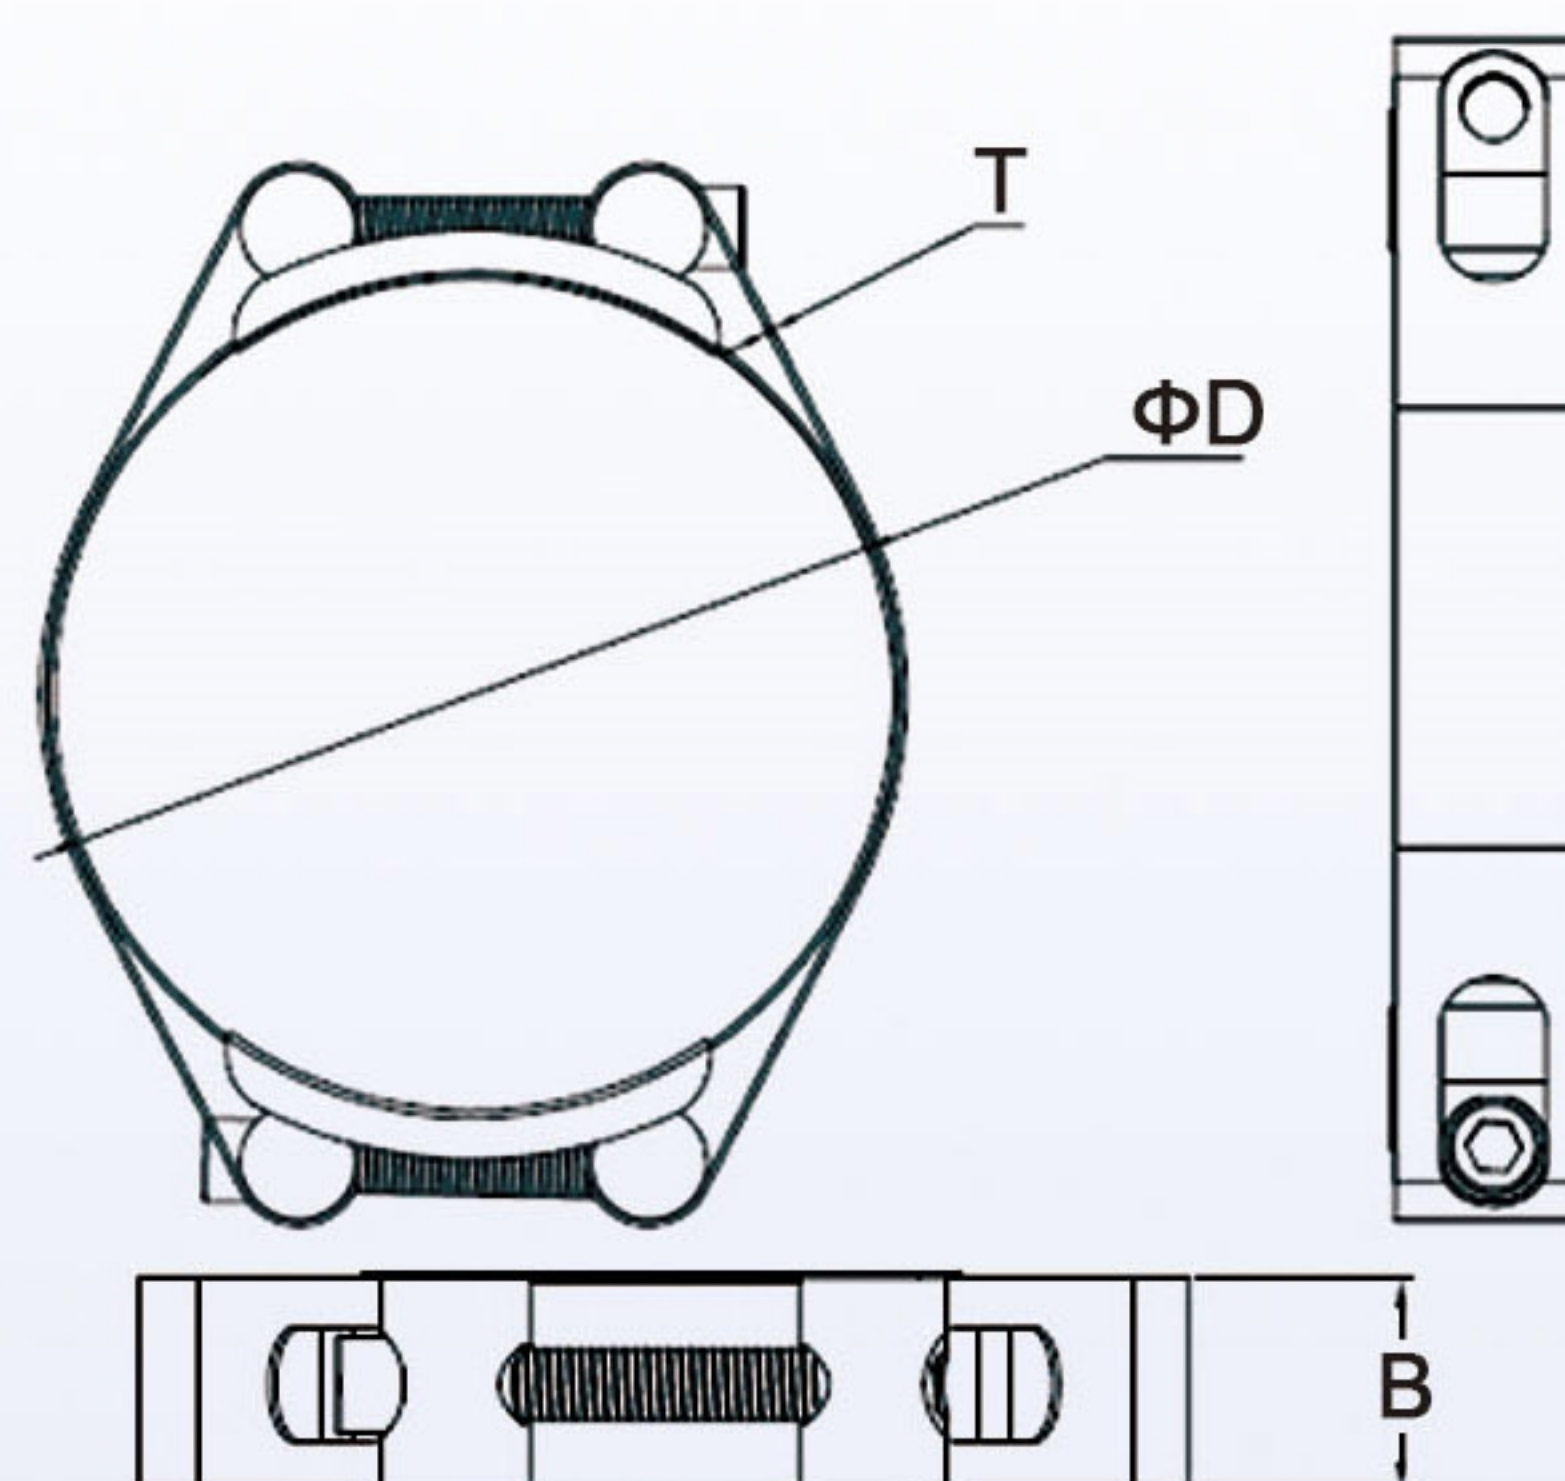

K-SEAL code	Band	Housing	Screw	Corrosion Resistance	Suggest Installation Torque(Nm)
KDxXxx(W1)	glavanized steel	glavanized steel	glavanized steel	Ordinary	See table
KGDxXxxSS	AISI 304 SS	AISI 304 SS	AISI 304 SS	Better	See table
KLDxXxxSS	AISI 316 SS	AISI 316 SS	AISI 316 SS	Best	See table

W1 (Plated carbon steel)	W4 (304SS)	W5 (316SS)	Range(mm)	Bandwidth (mm)	Thickness (mm)	Screw size	QTY /Carton
KD20X45	KGD20X45SS	KLD20X45SS	35-45	20	1	M6×45	100
KD20X50	KGD20X50SS	KLD20X50SS	40-50				100
KD20X55	KGD20X55SS	KLD20X55SS	45-55				100
KD20X60	KGD20X60SS	KLD20X60SS	50-60				100
KD20X65	KGD20X65SS	KLD20X65SS	55-65				100
KD24X70	KGD24X70SS	KLD24X70SS	60-70	24	1	M8×60	50
KD24X75	KGD24X75SS	KLD24X75SS	65-75				50
KD24X80	KGD24X80SS	KLD24X80SS	70-80				50
KD24X85	KGD24X85SS	KLD24X85SS	75-85				50
KD24X90	KGD24X90SS	KLD24X90SS	80-90				50
KD24X95	KGD24X95SS	KLD24X95SS	85-95	24	1	M8×60	50
KD24X100	KGD24X100SS	KLD24X100SS	90-100				40
KD24X105	KGD24X105SS	KLD24X105SS	95-105				40
KD24X110	KGD24X110SS	KLD24X110SS	100-110				40
KD24X115	KGD24X115SS	KLD24X115SS	105-115				40
KD24X120	KGD24X120SS	KLD24X120SS	110-120				40
KD24X125	KGD24X125SS	KLD24X125SS	115-125				40
KD24X130	KGD24X130SS	KLD24X130SS	120-130				40
KD24X140	KGD24X140SS	KLD24X140SS	130-140				40
KD24X150	KGD24X150SS	KLD24X150SS	140-150				40
KD24X160	KGD24X160SS	KLD24X160SS	150-160				40
KD24X170	KGD24X170SS	KLD24X170SS	160-170				40
KD24X180	KGD24X180SS	KLD24X180SS	170-180				40
KD24X190	KGD24X190SS	KLD24X190SS	180-190				40

Available in packed and bulk stock. Other packaging methods available.

Clamps meet or exceed DIN3017 .

More SIZES AVAILABLE UPON REQUEST.

