


Quick Release Clamp

These quick release worm drive clamps are good for closed system applications where the clamp must be disengaged to be applied. They are easy to install and remove due to the swivel action locking of the screw. This clamp has a large clamping range which makes them very versatile.

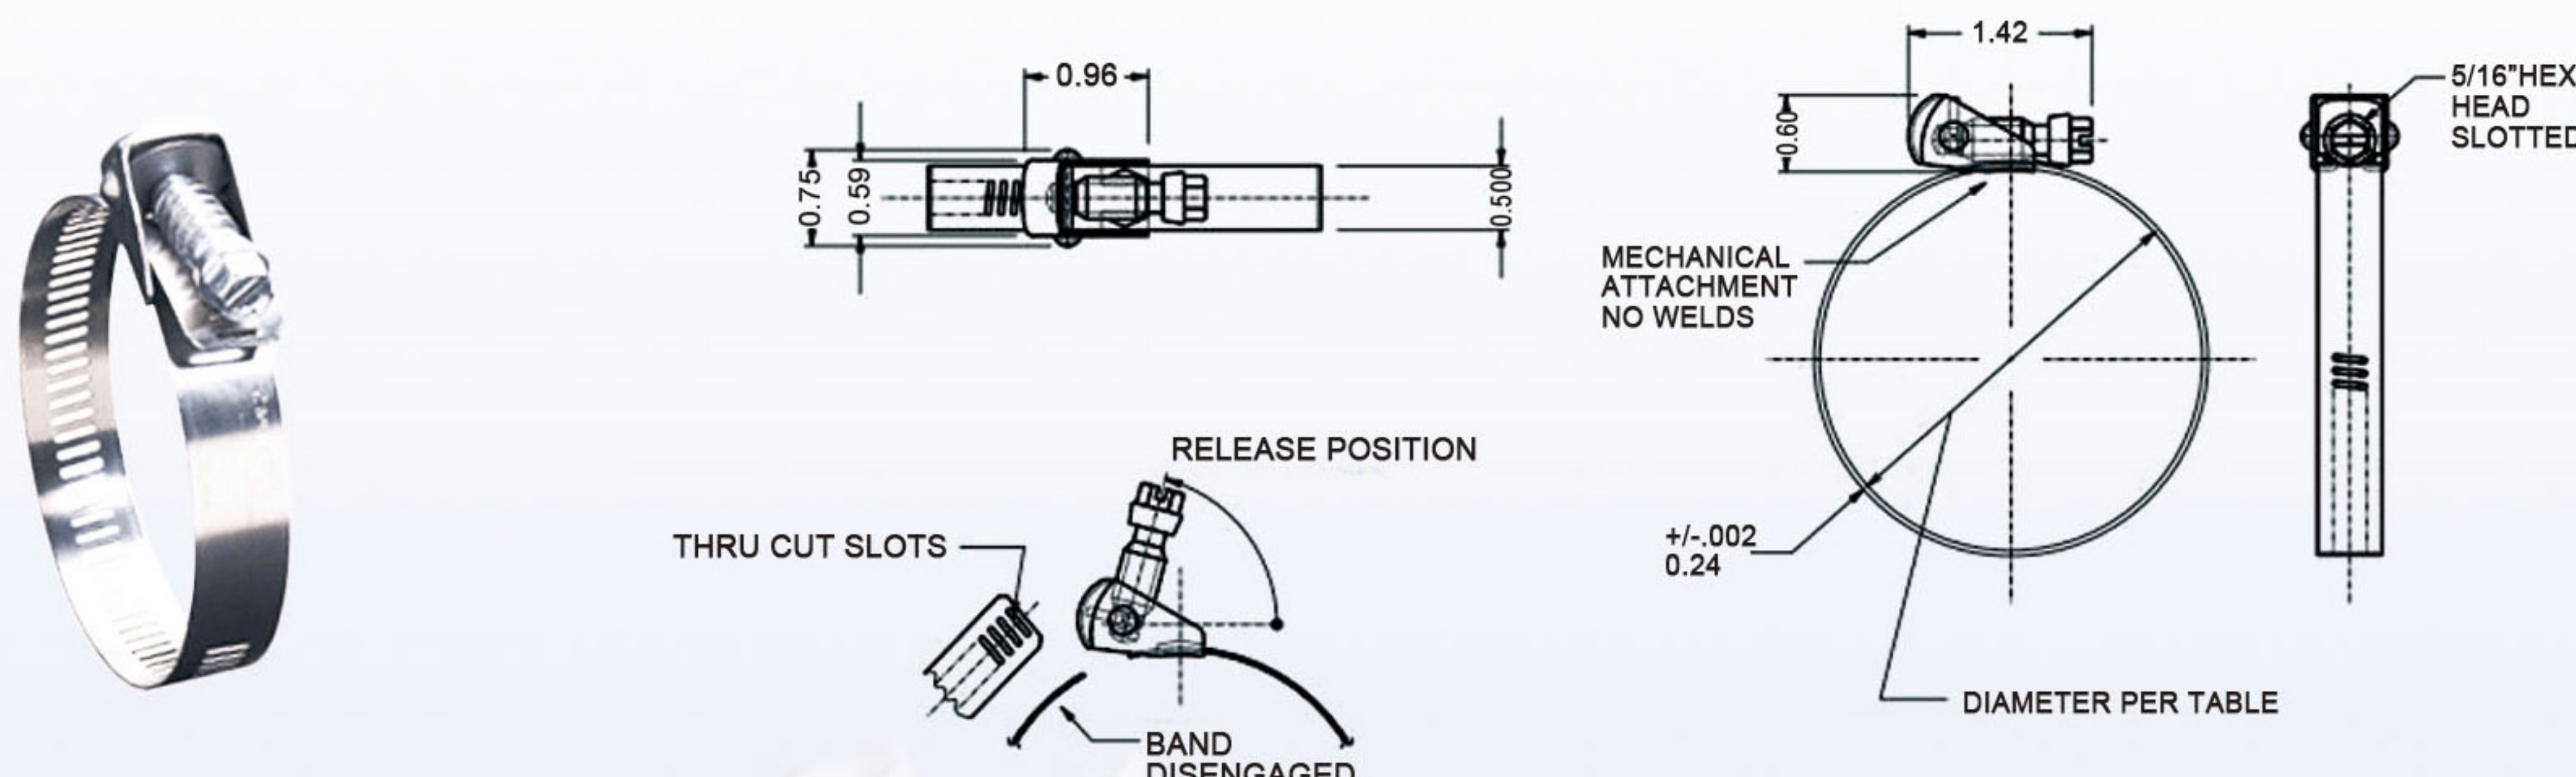

K-SEAL code	Band	Housing	Thrust Block	Screw	Corrosion Resistance	Suggest Installation
QRXXXSS	200Series SS	200Series SS	420SS	410SS	Good	4.0-5.0
QRXXXS2	200Series SS	200Series SS	420SS	200Series SS	Good	4.0-5.0
QRXXXS3	300Series SS	300Series SS	420SS	300Series SS	Better	4.0-5.0

Size Ref	Diameter Range			
	Min(inch)	Max(inch)	Min (mm)	Max (mm)
12	0.50	1.25	13	32
16	0.75	1.50	19	38
20	0.75	1.75	19	44
24	0.75	2.00	19	51
28	1.00	2.25	25	57
32	1.00	2.50	25	64
36	1.00	2.75	25	70
40	1.00	3.00	25	76
44	1.00	3.25	25	83
48	1.50	3.50	38	89
52	1.50	3.75	38	95
56#	1.50	4.00	38	102
60	1.50	4.25	38	108
64	1.50	4.50	38	114
68	1.50	4.75	38	121
72#	1.50	5.00	38	127
76	1.50	5.25	38	133
80	1.50	5.50	38	140
84	1.50	5.75	38	146
88#	2.00	6.00	51	152
92	2.00	6.25	51	159
96	2.00	6.50	51	165
100	2.00	6.75	51	171
104#	2.00	7.00	51	178
108	2.00	7.25	51	184
112	2.00	7.50	51	191
116	2.00	7.75	51	197
120	2.00	8.00	51	203
124	2.00	8.25	51	210
128	2.00	8.50	51	216
132	2.00	8.75	51	222

Size Ref	Diameter Range			
	Min(inch)	Max(inch)	Min (mm)	Max (mm)
136	2.00	9.00	51	229
140	2.00	9.25	51	235
144	2.00	9.50	51	241
148	2.00	9.75	51	248
152	2.00	10.00	51	254
156	2.00	10.25	51	260
160	2.00	10.50	51	267
164	2.00	10.75	51	273
168	2.00	11.00	51	279
172	2.00	11.25	51	286
176	2.00	11.50	51	292
180	2.00	11.75	51	298
184	2.00	12.00	51	305
188#	2.00	12.25	51	311
192	2.00	12.50	51	318
200	2.00	13.00	51	330
208	2.00	13.50	51	343
216	2.00	14.00	51	356
224	2.00	14.50	51	368
232	2.00	15.00	51	381
240	2.00	15.50	51	394
248#	2.00	16.00	51	406
256	2.00	16.50	51	419
258	2.00	16.63	51	422
264	2.00	17.00	51	432
272	2.00	17.50	51	445
280	2.00	18.00	51	457
288#	2.00	18.50	51	470
296	2.00	19.00	51	483
304	2.00	19.50	51	495
312#	2.00	20.00	51	508

Available in packed and bulk stock. Other packaging methods available.

Clamps meet or exceed SAE J1508 Type F.

More SIZES AVAILABLE UPON REQUEST.

