




T-Bolt Clamps

T-bolt band clamps are designed to provide connections without leaks. They are typically installed in truck exhaust or air inlet and water hoses, motorcycle exhaust systems, marine applications, irrigation system hoses, water pump hoses and filter bags. Band edges are rounded to protect the hose.

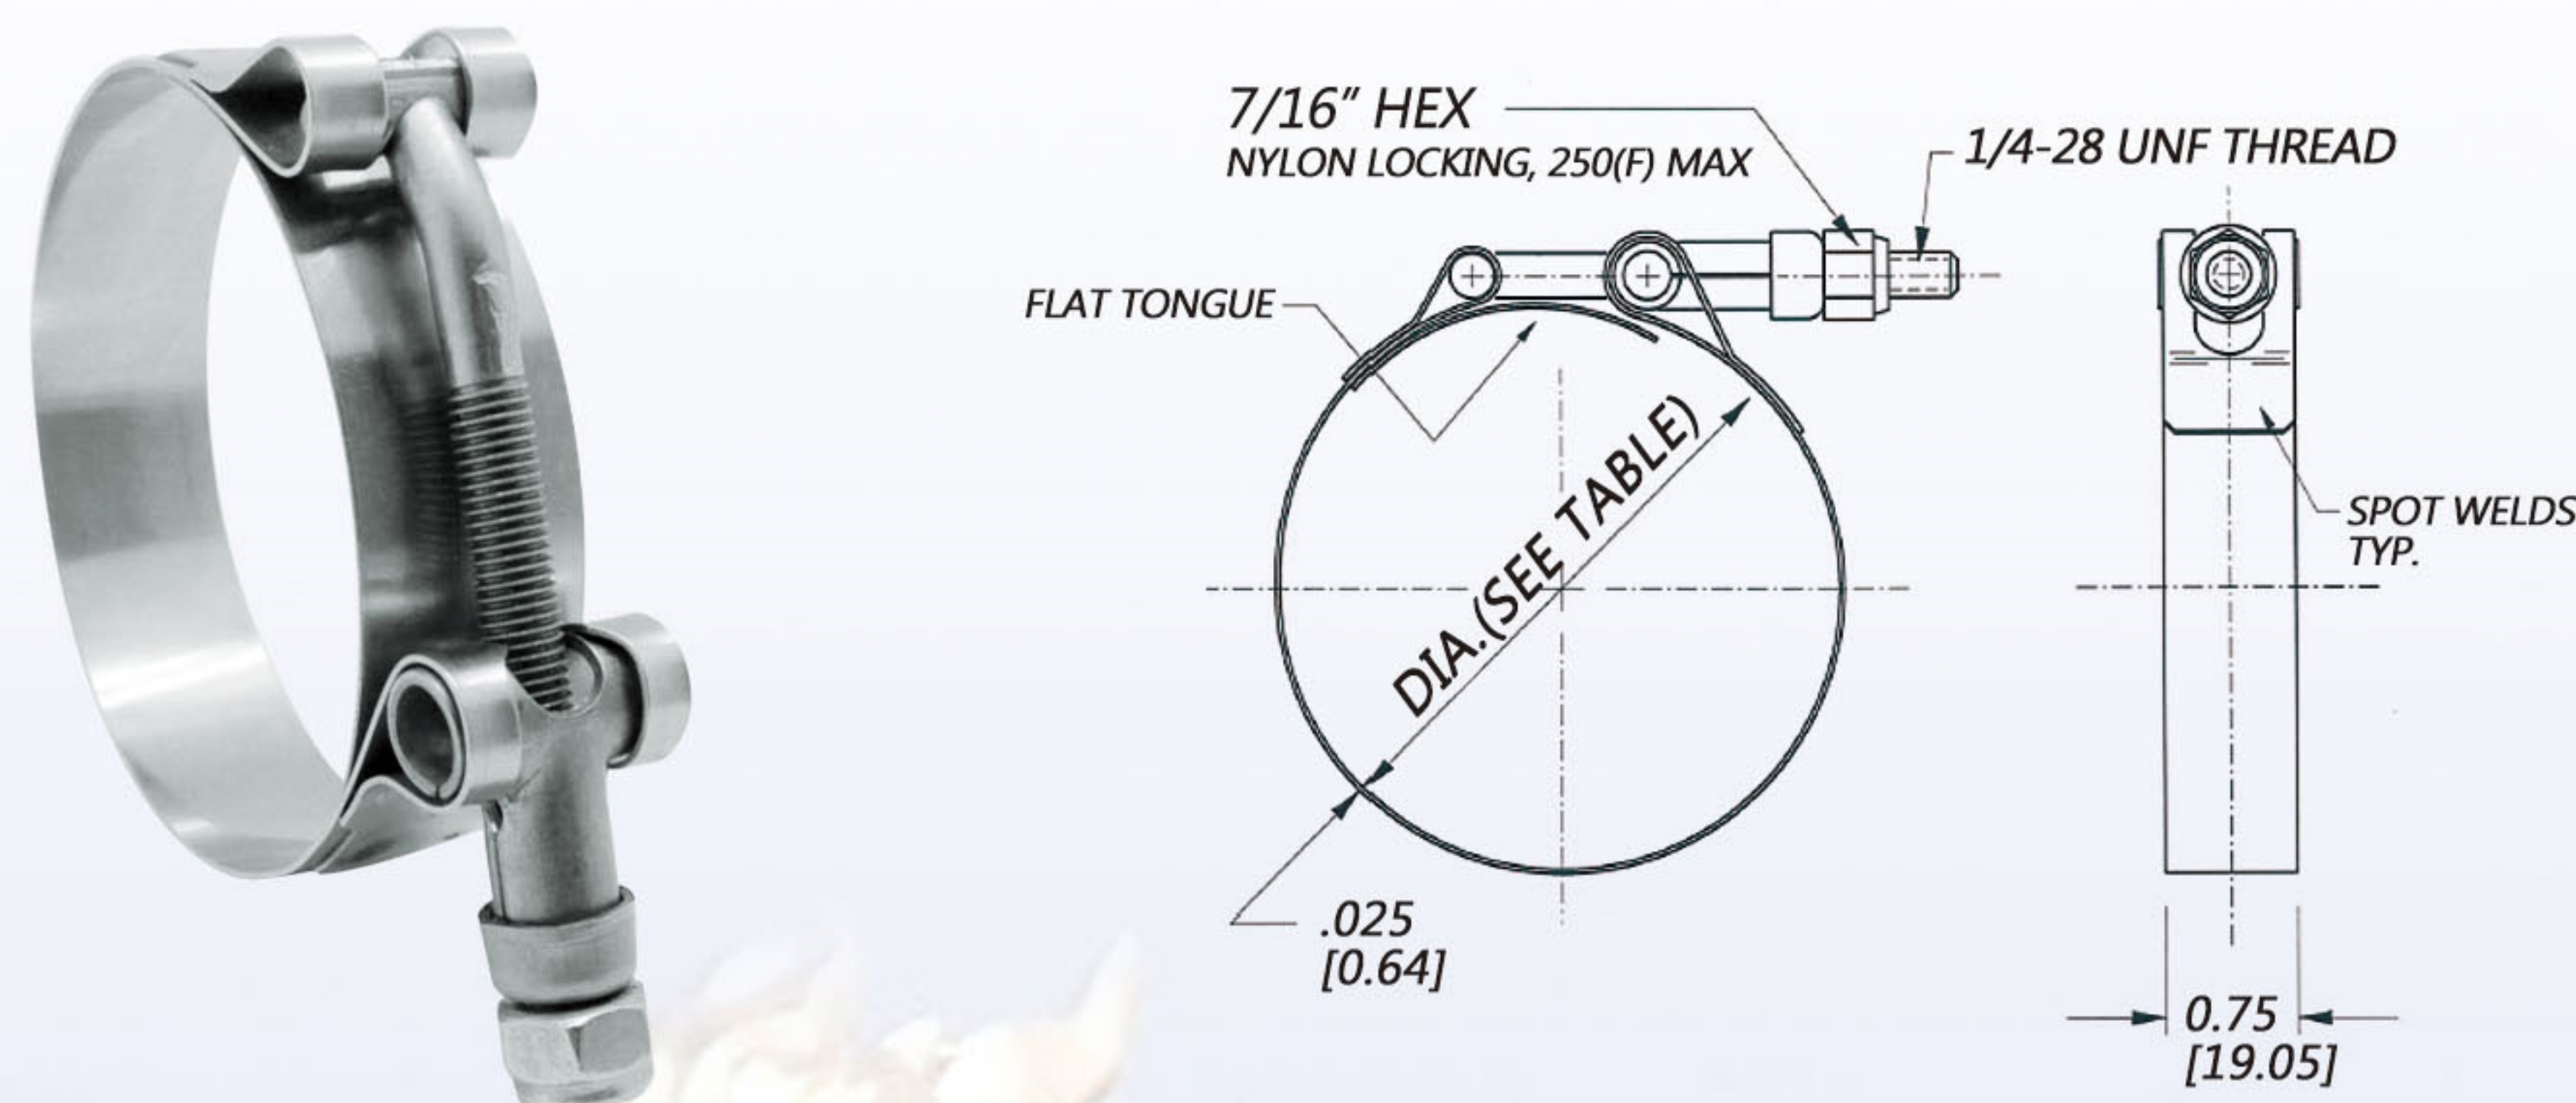

K-SEAL code	Band & Bridge	Trunnion	Bolt & Nut	Corrosion Resistance	Suggest Installation Torque(Nm)
TBHXXXJ-K	301SS	301SS	glavanized steel	Good	5.6-6.8Nm
TBFXXXJ-K	301SS	301SS	301SS	Good	5.6-6.8Nm
TBGXXXJ-K	304SS	304SS	304SS	Better	5.6-6.8Nm
TBLXXXJ-K	316SS	316SS	316SS	Best	5.6-6.8Nm

Size	Inches(″)			Millimeters(mm)		
	Nominal	Min.	Max.	Nominal	Min.	Max.
156	1.50	1.31	1.56	38	33	40
187	1.75	1.62	1.87	44	41	47
206	2.00	1.81	2.06	51	46	52
225	2.15	1.94	2.25	55	49	57
237	2.25	2.06	2.37	57	52	60
250	2.40	2.19	2.50	61	56	64
262	2.50	2.31	2.62	64	59	67
287	2.75	2.56	2.87	70	65	73
312	3.00	2.81	3.12	76	71	79
337	3.25	3.06	3.37	83	78	86
359	3.50	3.28	3.59	89	83	91
387	3.78	3.56	3.87	96	90	98
394	3.85	3.63	3.94	98	92	100
412	4.00	3.81	4.12	102	97	105
437	4.25	4.06	4.37	108	103	111
462	4.50	4.31	4.62	114	109	117
487	4.75	4.56	4.87	121	116	124
512	5.00	4.81	5.12	127	122	130
537	5.25	5.06	5.37	133	129	136
562	5.50	5.31	5.62	140	135	143
587	5.75	5.56	5.87	146	141	149
612	6.00	5.81	6.12	152	148	155
637	6.25	6.06	6.37	159	154	162
662	6.50	6.31	6.62	165	160	168
687	6.75	6.56	6.87	171	167	174
712	7.00	6.81	7.12	178	173	181
737	7.25	7.06	7.37	184	179	187
762	7.50	7.31	7.62	191	186	194
787	7.75	7.56	7.87	197	192	200
812	8.00	7.81	8.12	203	198	206
837	8.25	8.06	8.37	210	205	213
919	9.00	8.61	9.19	229	219	233
1113	11.00	10.55	11.13	279	268	283
1313	13.00	12.55	13.13	330	319	334

Available in packed and bulk stock. Other packaging methods available.

Clamps meet or exceed SAE J1508 Type TB.

More SIZES AVAILABLE UPON REQUEST.

