


1/2" Wide Worm Drive Hose Clamp

Suitable for most common household and automotive applications. The bands have clean punched rectangular perforations that hold strong and connect easily.



K-SEAL Clamp Key

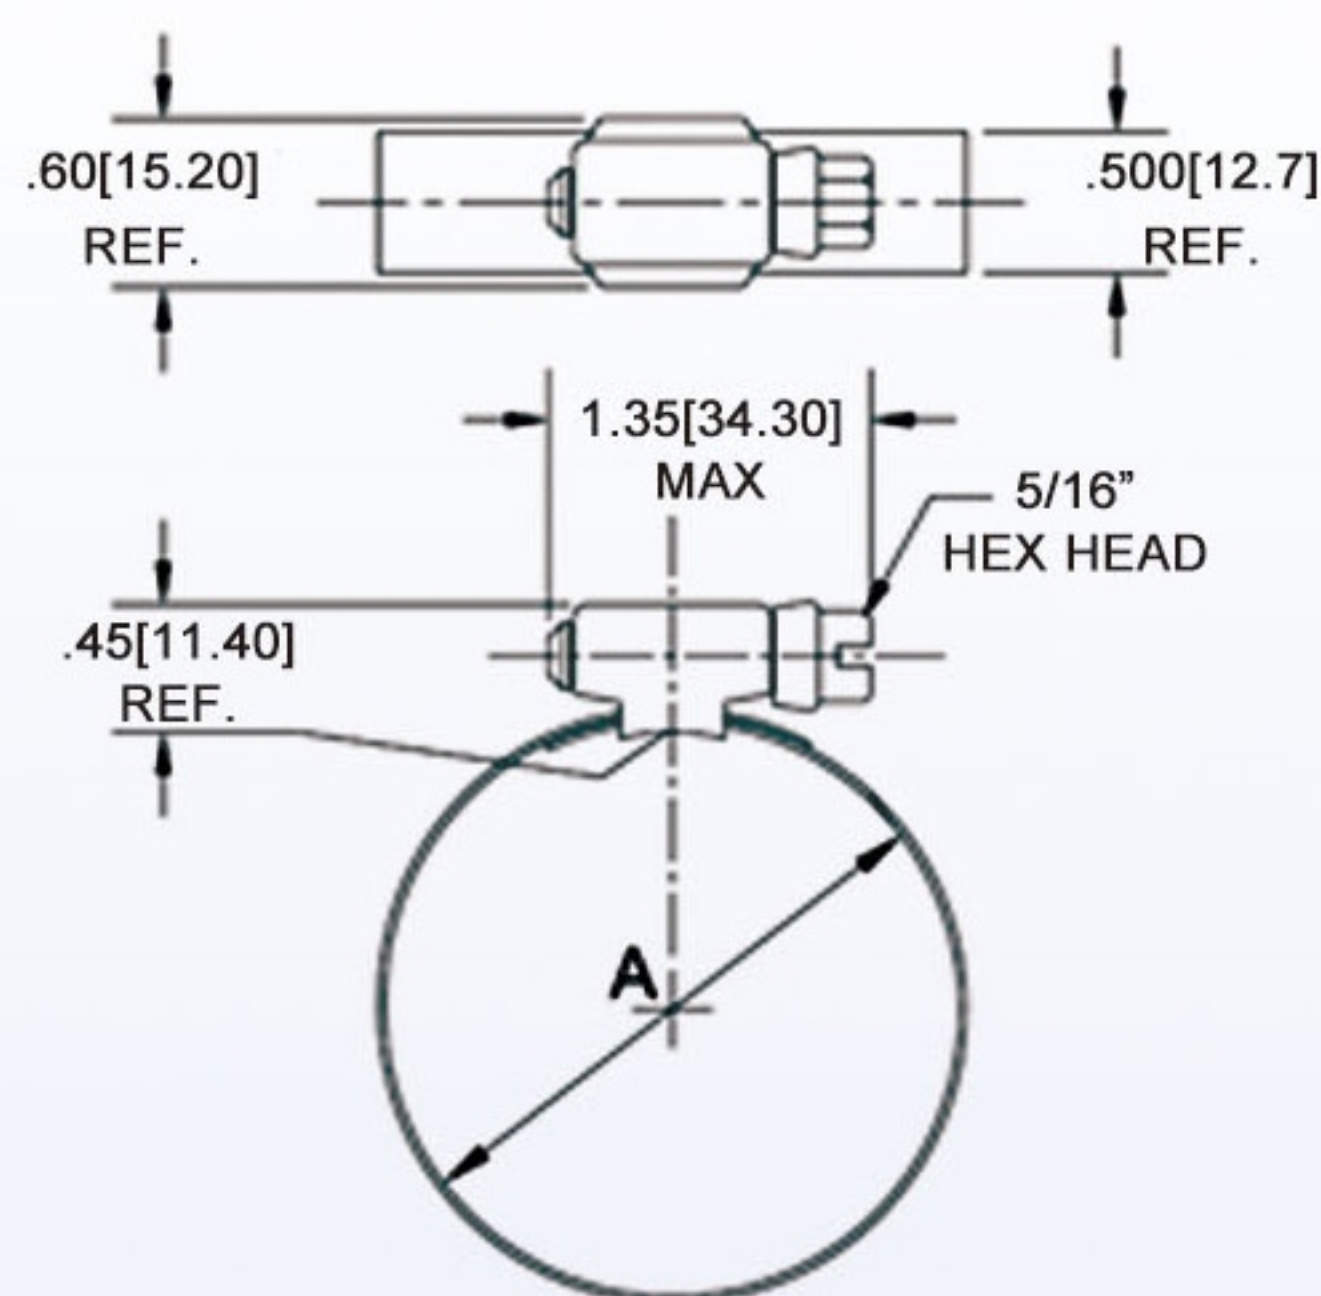

K-SEAL code	Band	Housing	Screw	Corrosion Resistance	Suggest Installation Torque(Nm)
KBxx	AISI 201 SS	AISI 201 SS	galvanized steel	Ordinary	3.4--4.5 Nm
KAxSS	201 SS	201 SS	201 SS	Good	4.0--5.1 Nm
KBxxSS	AISI 201 SS	AISI 201 SS	AISI 201 SS/410SS	Better	4.0--5.1 Nm
KFxxSS	AISI 300SS	AISI 300SS	AISI 301 SS	Best	4.0--5.1 Nm
KGxxSS	AISI 304 SS	AISI 304 SS	AISI 304 SS	Best	4.0--5.1 Nm
KLxxSS	AISI 316 SS	AISI 316 SS	AISI 316 SS	Highest	4.0--5.1 Nm

Size Ref	Diameter Range				QTY/Carton
	Min(inch)	Max(inch)	Min (mm)	Max (mm)	
6	7/16	25/32	11	20	500
8	7/16	29/32	11	23	500
10	9/16	1-1/16	14	27	500
12	11/16	1-1/4	17	32	500
16	3/4	1-1/2	19	38	500
20	13/16	1-3/4	21	44	500
24	1-1/16	2	27	51	500
28	1-5/16	2-1/4	33	57	500
32	1-9/16	2-1/2	40	64	400
36	1-13/16	2-3/4	46	70	400
40	2-1/16	3	52	76	400
42	2-1/5	3-1/5	56	80	400
44	2-5/16	3-1/4	59	83	400
48	2-9/16	3-1/2	65	89	400
52	2-13/16	3-3/4	71	95	400
56	3-1/16	4	78	102	400
60	3-5/16	4-1/4	84	108	400
64	3-9/16	4-1/2	90	114	300
68	3-13/16	4-3/4	97	121	300
72	4-1/16	5	103	127	300
76	4-5/16	5-1/4	110	133	300
80	4-9/16	5-1/2	116	140	300
84	4-13/16	5-3/4	122	146	300
88	5-1/16	6	129	152	200
92	5-5/16	6-1/4	135	159	200
96	5-9/16	6-1/2	141	165	200
104	6-1/16	7	154	178	200
108	6-5/16	7-1/4	160	184	200
112	6-9/16	7-1/2	167	191	200
116	6-1/2	7-3/4	165	197	200
128	5-11/16	8-1/2	144	216	200
140	6-7/16	9-1/4	163	235	200
152	7-3/16	10	183	254	200
160	7-11/16	10-1/2	195	267	200
164	7-15/16	10-3/4	202	273	200
176	8-11/16	11-1/2	225	292	100
188	9-7/16	12-1/4	239	311	100
236	12-7/16	15-1/4	315	387	100
248	13-3/16	16	335	406	100

Available in packed and bulk stock. Other packaging methods available.

Clamps meet or exceed SAE J1508 Type F.

More SIZES AVAILABLE UPON REQUEST.

