




5/16" Wide Worm Drive Clamp

Lightweight, low profile, compact design allows ease of installation in space restricted applications. The 5/16" band width generates significant sealing pressure with relatively low installation torque levels.

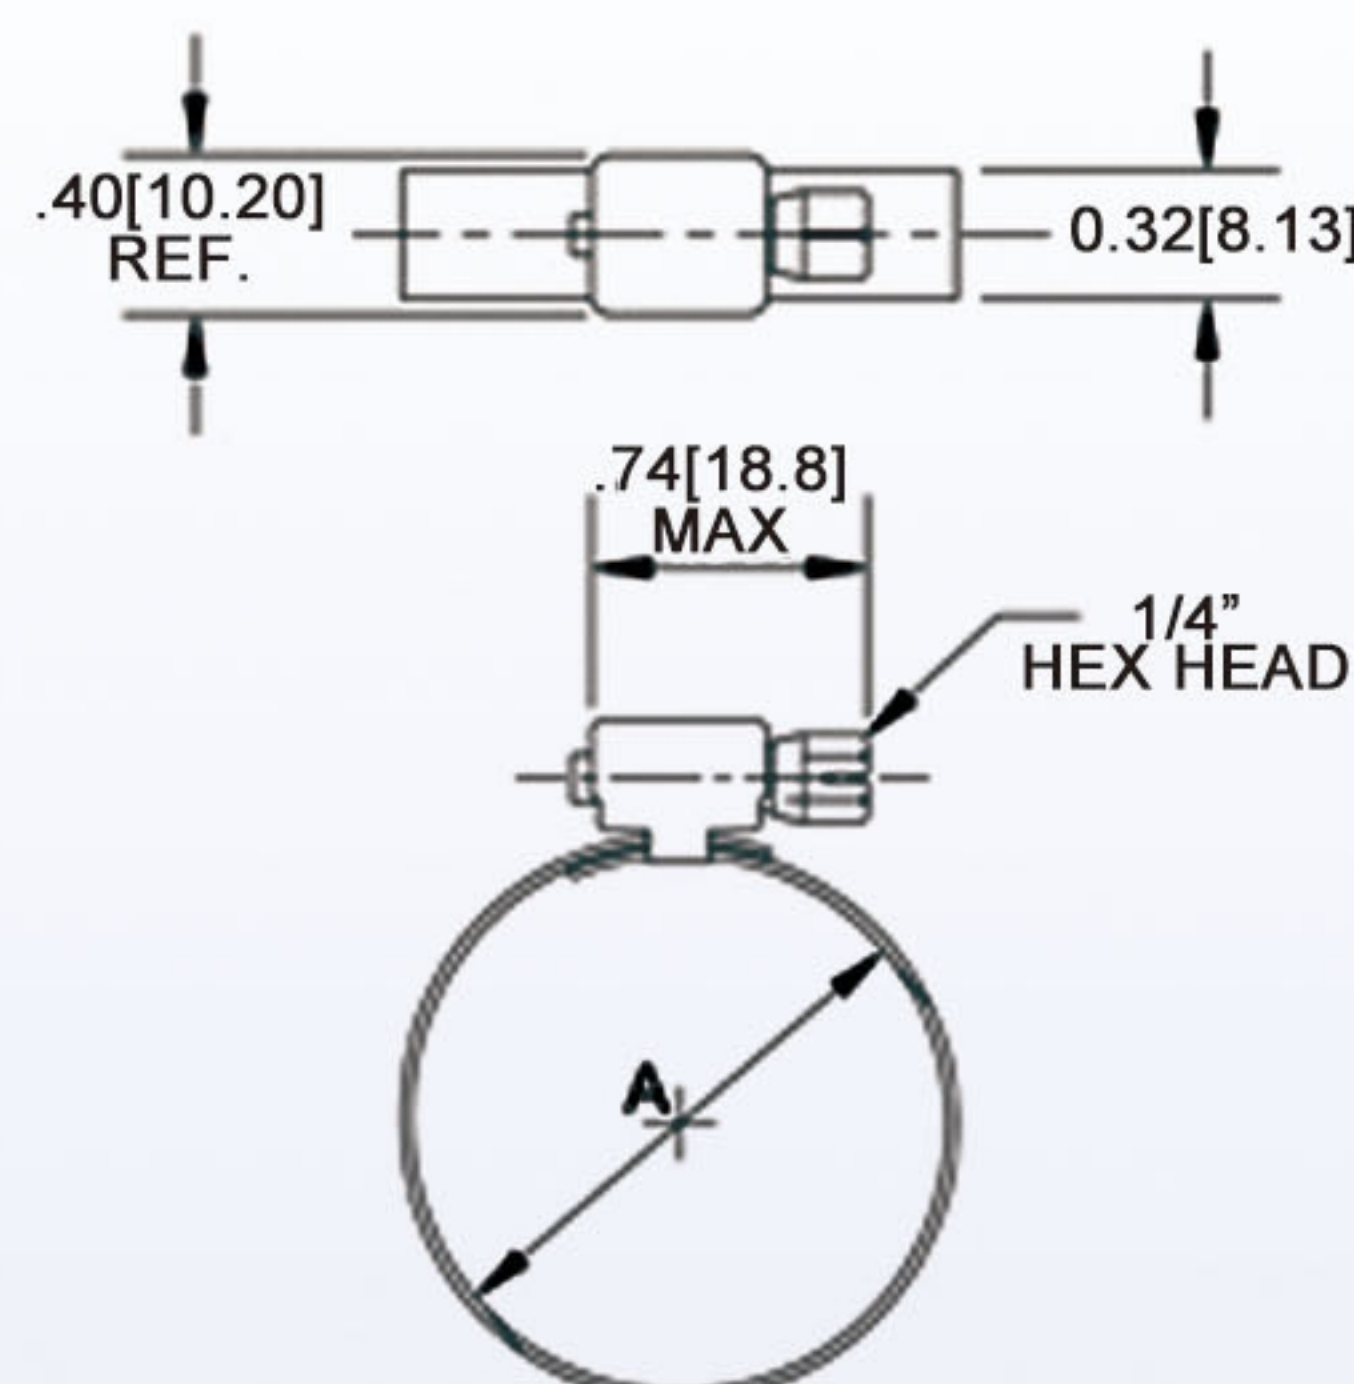

K-SEAL code	Band	Housing	Screw	Corrosion Resistance	Suggest Installation Torque(Nm)
KMMAxx	AISI 101 SS	AISI 101 SS	galvanized steel	Ordinary	2.3
KMMCxxSS	AISI 101 SS	AISI 101 SS	AISI 101 SS	Ordinary	1.7
KMMQXXSS	AISI 300 SS	AISI 300 SS	galvanized steel	Ordinary	2.3
KMMPXXSS	AISI 300SS	AISI 300SS	AISI 410SS	Good	1.7
KMMFXXSS	AISI 300 SS	AISI 300SS	AISI 304 SS	Better	1.7
KMMGxxSS	AISI 304 SS	AISI 304 SS	AISI 304 SS	Best	1.7
KMMLxxSS	AISI 316 SS	AISI 316 SS	AISI 316 SS	Highest	1.7

Size Ref	Diameter Range				QTY/Carton
	Min(inch)	Max(inch)	Min (mm)	Max (mm)	
3	1/4	1/2	6	13	2000
4	1/4	5/8	6	16	2000
5	5/16	29/32	8	23	1500
8	3/8	1	10	25	1000
10	9/16	1-1/16	14	27	1000
12	11/16	1-1/4	17	32	1000
16	7/8	1-1/2	23	38	1000
20	1-5/32	1-3/4	29	44	1000
24	1-7/16	2	36	51	500
28	1-5/8	2-1/4	41	57	500
32	1-13/16	2-1/2	47	63	500
36	2-3/16	2-3/4	55	70	500
40	2-3/8	3	61	76	500

Available in packed and bulk stock. Other packaging methods available.
Clamps meet or exceed SAE J1508 TYPE M.
More SIZES AVAILABLE UPON REQUEST.

